


# Metering Station

## Fixed Orifice • Flange Connection • Class 150



**Terminator MS Flange x Flange**

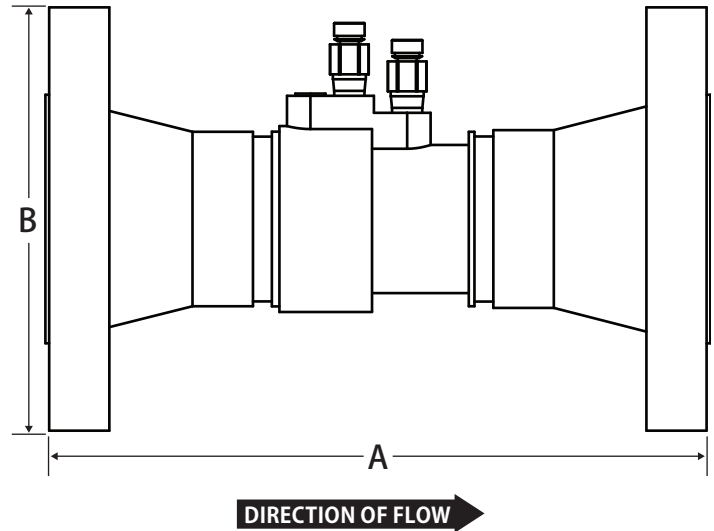

### Features

- +/- 1% Accuracy
- Two pressure / temperature (PT) test ports
- Location tag
- Additional accessory tap
- Class 150 Flange
- 100% leak tested
- 5 straight pipe diameters are required upstream of metering station
- 2-1/2 straight pipe diameters are required downstream of metering station
- See end of catalog for pressure drop chart

### Pressure and Temperature Rating

- 200 WOG
- 225°F Max


### Material Specifications

| Part         | Material                |
|--------------|-------------------------|
| Venturi Body | Carbon Steel - ASTM 126 |
| Flange (2)   | Carbon Steel - ASTM 126 |

### Dimensions

| Size   | A    | B    |
|--------|------|------|
| 2-1/2" | 10.9 | 7.0  |
| 3"     | 11.3 | 7.5  |
| 4"     | 12.5 | 9.0  |
| 6"     | 15.0 | 11.0 |
| 8"     | 16.9 | 13.5 |
| 10"    | 20.6 | 16.0 |
| 12"    | 26.3 | 19.0 |


### Smart Part Number Ordering Guide

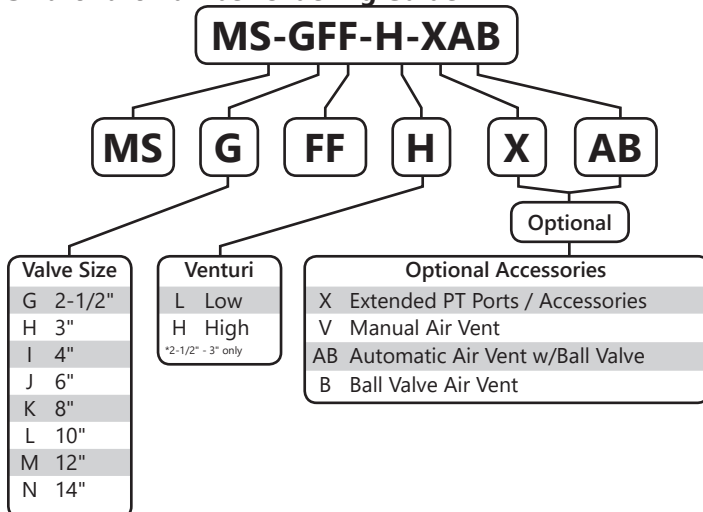

# Pressure Drop Chart

## Terminator MS (2-1/2" - 4")

Permanent pressure loss is 6% of the differential pressure

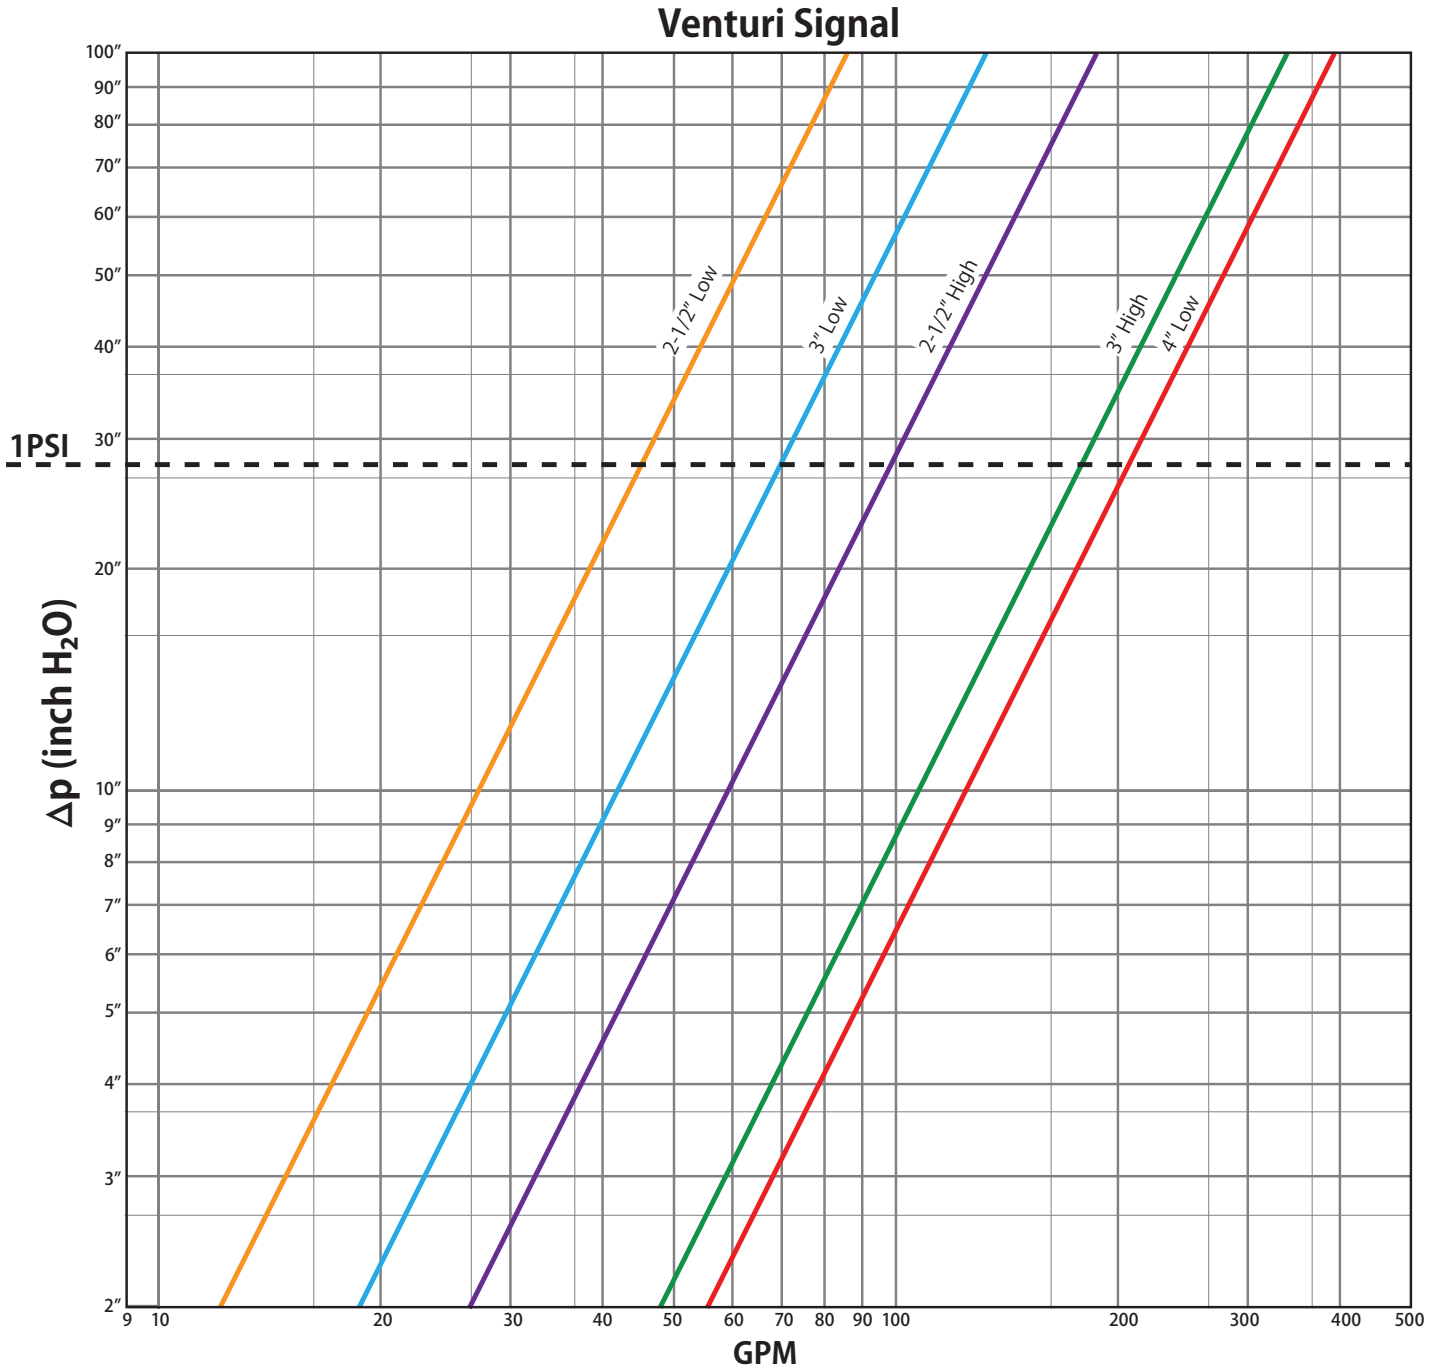

# Pressure Drop Chart

## Terminator MS (6" - 12")

Permanent pressure loss is 6% of the differential pressure

