

Flexible Hose

Braided Stainless Steel Hose • EPDM Core • Dual Union




Features

- Designed for water source heat pump hose kits
- ASTM E84 Fire rated - meets 25/50
- Union Connection
 - 1/2" - 3/4" gasket-less cone connection
 - Mounts direct to TY/TA-__H Series Valves
- 100% leak tested

Temperature Rating

-5°F to 195°F

Smart Part Number Ordering Guide

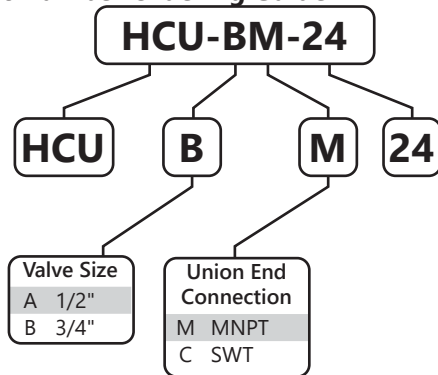

Material Specifications

Part	Material
Hose Braiding	304 Stainless Steel
Crimping Ferrules	304 Stainless Steel
Core	EPDM
End Connection	Brass - CW614N
Union Nut	Nickle Plated Brass - CW614N
Tail Piece	Brass - CW614N

Max. Operating, Burst Pressure Rating, and CV

Size	Operating (PSI)	Burst (PSI)	CV
1/2"	400	1500	3.1
3/4"	400	1200	9.9

Installation Notes

- ON INSTALLATION : Avoid absolutely any tension due to stretching, twisting or torsion during the course of tightening the connectors.
- Use two spanners in order to screw in the union: One to hold the hexagon of the adapter. The other to tighten the nut at the same time.

IMPORTANT - Not applicable for gas or potable water applications. Before installing refer to the installation & operation instructions for complete details.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.