


Combination Ball Valve

Isolation Ball Valve • Union • 600 WOG • with Stainless Steel Trim



Terminator N SS

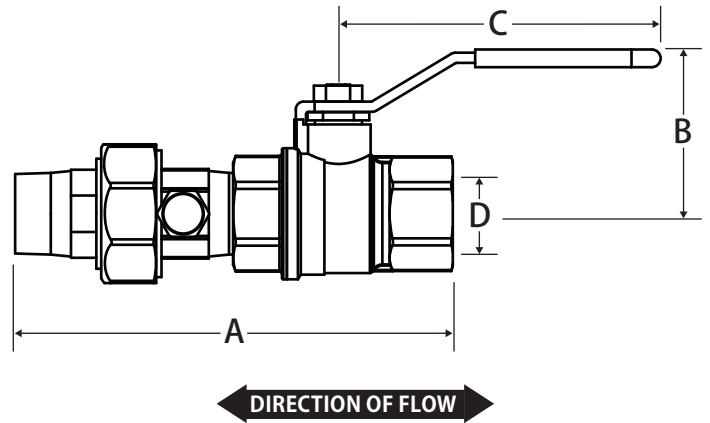


Features

- Pressure / temperature (PT) test ports
- Additional accessory tap
- Triple sealing stem with 2 Viton® o-rings and Teflon® seal
- Blow out proof stem
- 100% leak tested
- Leakproof stem - Lifetime warranty

Pressure and Temperature Rating

- 1/2" - 3/4" 600 WOG
- 1" - 2" 500 WOG
- 300°F Max

Smart Part Number Ordering Guide

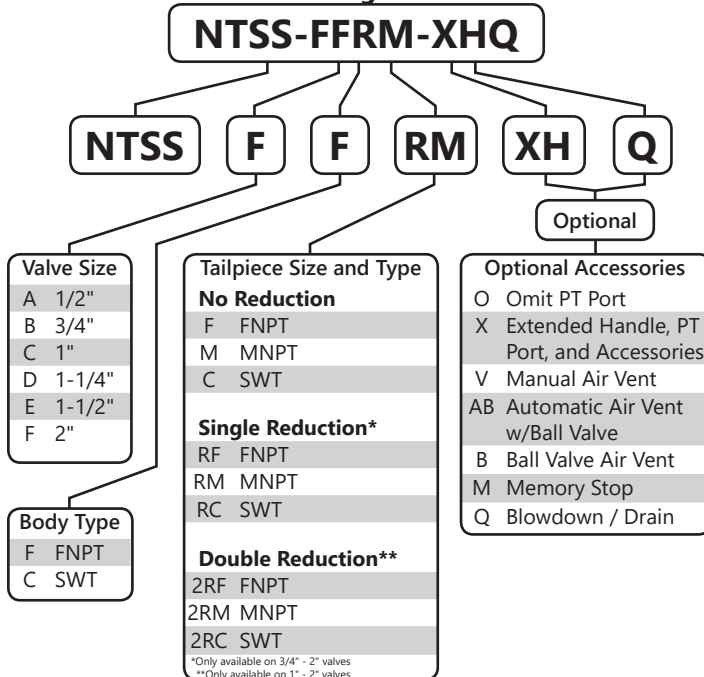

Material Specifications

Part	Material
Body	T.E.A. Coated Brass - CW617N
End Connection	T.E.A. Coated Brass - CW617N
Ball	316 Stainless Steel
Seat (2)	Hostaflon® TFM 1600
Stem	316 Stainless Steel
Packing	Hostaflon® TFM 1600
Stem O-ring (2)	Viton®
Packing Gland	Nickel Plated Brass - CW614N
Handle	Steel - Geomet® Plated
Handle Nut	Steel - Geomet® Plated
Union	(See Terminator U Spec Sheet)

Dimensions

Size	A	B	C	D	Cv
1/2"	5.17	1.53	2.95	0.59	16.82
3/4"	5.34	1.93	3.74	0.79	34.80
1"	6.03	2.40	4.72	1.00	52.20
1-1/4"	7.22	2.59	4.72	1.25	112.52
1-1/2"	7.70	3.22	5.90	1.57	174.00
2"	8.62	3.50	5.90	2.00	255.20

*Length is for a FNPT x MNPT valve, additional dimensions available upon request