


# Automatic Balancing Valve

## Automatic Flow Limiter, Union, 400 WOG

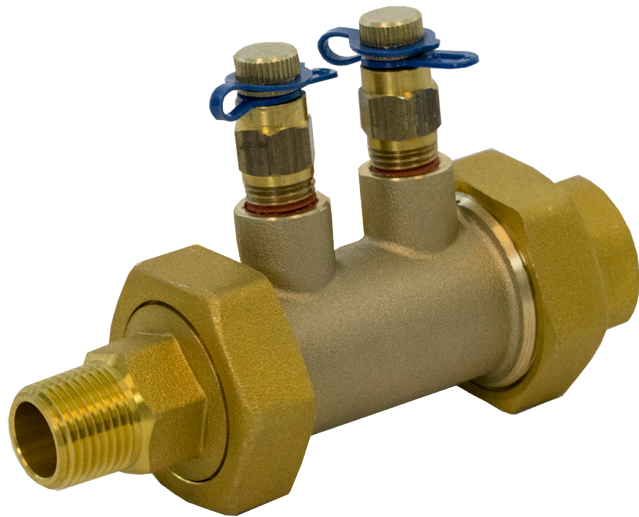


TAF

### Features

- +/- 5% accuracy
- Two pressure / temperature (PT) ports
- 100% lead tested

### Pressure and Temperature Rating

- 400 WOG
- 325°F Max

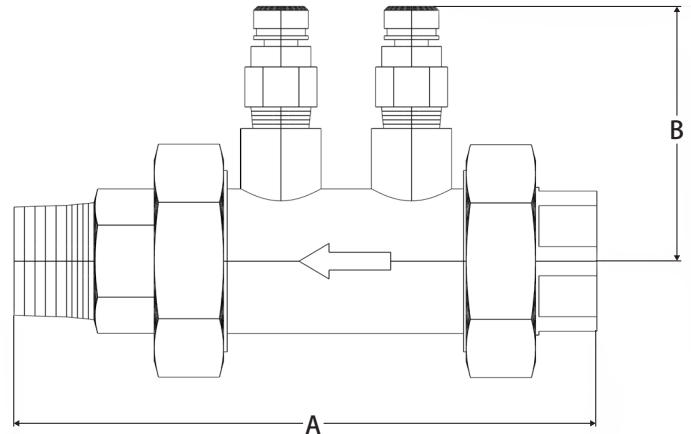

### Material Specifications


Part	Materials
Body	Lead Free Brass - CW510L
Union Nut (2)	Brass - CW617N
Tail Piece (2)	Lead Free Brass - CW510L
Temperature Test Port	Brass - CW617N
Balancing Cartridge	316 Stainless Steel

### Dimensions

Size	A	B
1/2"	5.23	2.29
3/4"	5.25	2.29
1"	6.32	2.29

\*Lengths is for FNPT x MNPT valve, additional dimensions available upon request

### Smart Part Number Ordering Guide

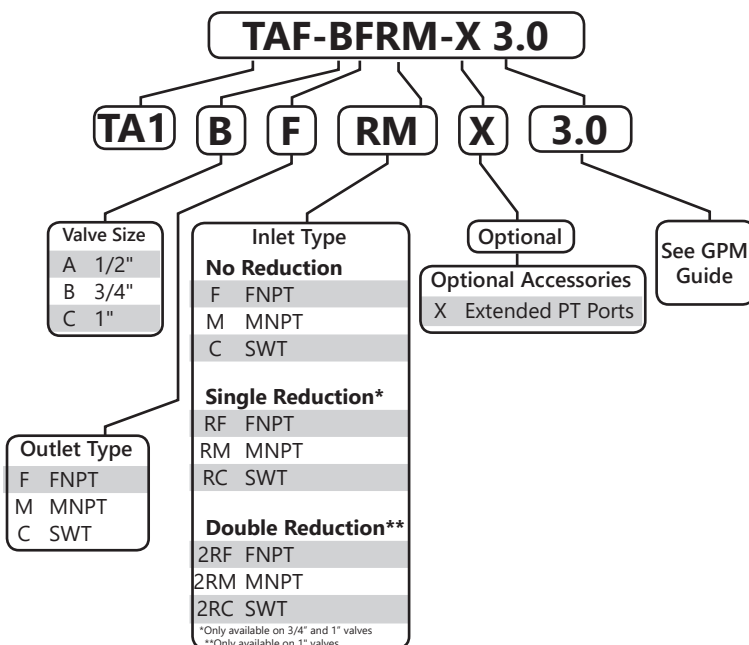

### GPM Ordering Guide

Cartridge	Pressure Range	GPM							
		1.00	2.00	3.00	4.00	4.50	6.00	7.00	8.00
C2-L	2-32	1.00	2.00	3.00	4.00	4.50	6.00	7.00	8.00
C2-H	5-60	9.00	10.00	11.00	12.00				



**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).