



Lead Free Manual Balancing Valve

Fixed Orifice • Isolation Ball Valve • Memory Stop • Union •
400 WOG

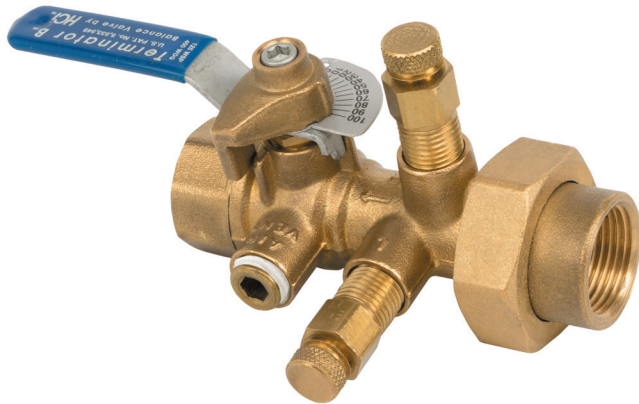

Terminator B Lead Free

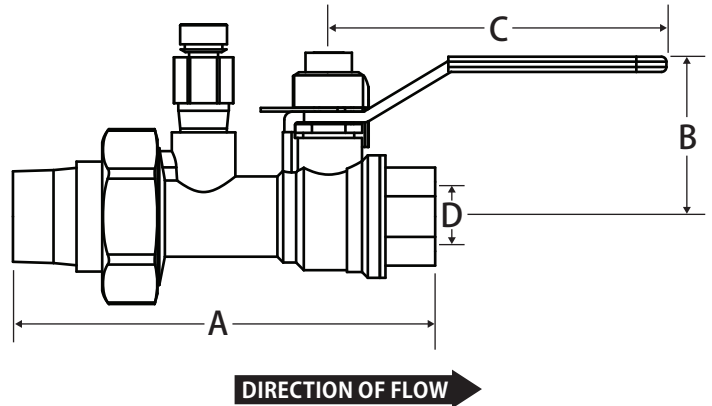


Features

- NSF 61-8 and NSF 372 Certified
- Patented removable venturi
- +/- 2% Accuracy
- Two pressure / temperature (PT) test ports
- Location tag
- Additional accessory tap
- Triple sealing stem with 2 Viton® o-rings and Teflon® seal
- Blow out proof stem
- 100% leak tested
- Made in Italy
- Leakproof stem - Lifetime warranty
- See end of catalog for pressure drop charts

Pressure and Temperature Rating

- 400 WOG
- 300°F Max

Smart Part Number Ordering Guide

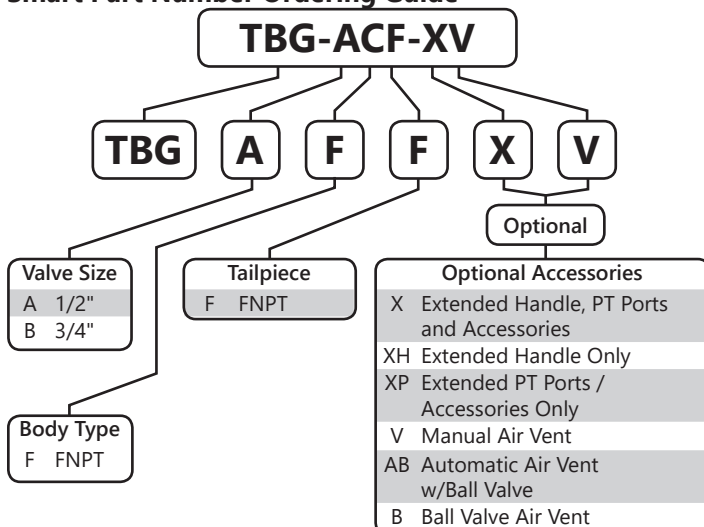

Material Specifications

Part	Material
Body	Lead Free Brass - CW510L
End Connection	Lead Free Brass - CW510L
Ball	TEA Coated Brass -CW510L
Seat (2)	Virgin PTFE
Stem	Brass - CW510L
Packing	Virgin PTFE
Stem O-ring (2)	Viton®
Packing Gland	Brass - CW614N
Handle	Steel - Geomet® Plated
Handle Nut	Steel - Geomet® Plated
Metering Plate	Aluminum
Memory Stop	Brass - CW617N
Memory Stop Screw	Steel - Geomet® Plated
Union O-ring	Viton®
Tail Piece	Lead Free Brass - CW510L
Union Nut	Brass - CW617N
Venturi	Lead Free Brass - CW510L
Venturi O-ring	Viton®

Dimensions

Size	A	B	C	D
1/2"	4.17	1.57	2.95	0.59
3/4"	4.17	1.57	2.95	0.59

Pressure Drop Chart

Terminator B (1/2" - 3/4")

CV of Valves

- 1/2" & 3/4" w/ #3 Venturi: **0.44**
- 1/2" & 3/4" w/ #4 Venturi: **1.30**
- 1/2" & 3/4" w/ #6 Venturi: **2.65**
- 1/2" & 3/4" w/ #7.5 Venturi: **3.61**
- 1/2" & 3/4" w/ #9 Venturi: **7.05**
- 1/2" & 3/4" w/ #12 Venturi: **11.40**

