


Manual Balancing Valve

Variable Orifice • Globe Valve • Threaded & Solder Connections • Memory Stop • 300 WOG



Terminator GV

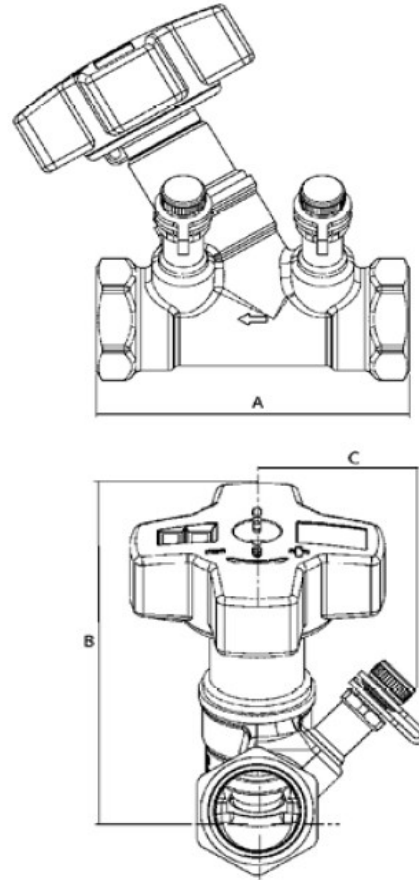

Features

- "Y" pattern globe style design
- Dezincification resistant brass
- Positive shut-off
- Offset pressure/temperature ports
- Multi-turn, 360° handwheel with vernier scale and digital readouts
- Built-in memory stop
- Precise flow measurement and flow balancing

Pressure / Temperature Rating

- 300 PSI
- -4°F to 250°F

Material Specifications

Part	Material
Body, Bonnet	Brass - C35330
Gasket	EPDM
Seat Seal	EPDM
Hand Wheel	Plastic

Dimensions

Part Number	Size	A	B	C	Minimum Flow	Nominal Flow	Maximum Flow
Threaded Connection							
TGV-AFF	1/2"	3.39	3.74	1.57	0.14	0.50-3.08	12.10
TGV-BFF	3/4"	3.54	3.74	1.65	0.26	3.80-5.50	17.40
TGV-CFF	1"	4.02	3.78	1.73	0.37	5.50-9.50	30.00
TGV-DFE	1-1/4"	4.72	3.78	1.85	0.60	9.50-14	44.60
TGV-EFF	1-1/2"	5.20	4.25	1.93	0.91	14-20	66.40
TGV-FFF	2"	6.46	4.37	2.09	1.52	20-33	107.20
Sweat Connection							
TGV-ACC	1/2"	3.39	3.74	1.57	0.14	0.50-3.08	12.10
TGV-BCC	3/4"	3.54	3.74	1.65	0.26	3.80-5.50	17.40
TGV-CCC	1"	4.02	3.78	1.73	0.37	5.50-9.50	30.00
TGV-DCC	1-1/4"	4.72	3.78	1.85	0.60	9.50-14	44.60
TGV-ECC	1-1/2"	5.20	4.25	1.93	0.91	14-20	66.40
TGV-FCC	2"	6.46	4.37	2.09	1.52	20-33	107.20



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.