Automatic Balancing Valve

Automatic Flow Limiter • Wafer Connection • 400 PSI

AT Wafer x Wafer

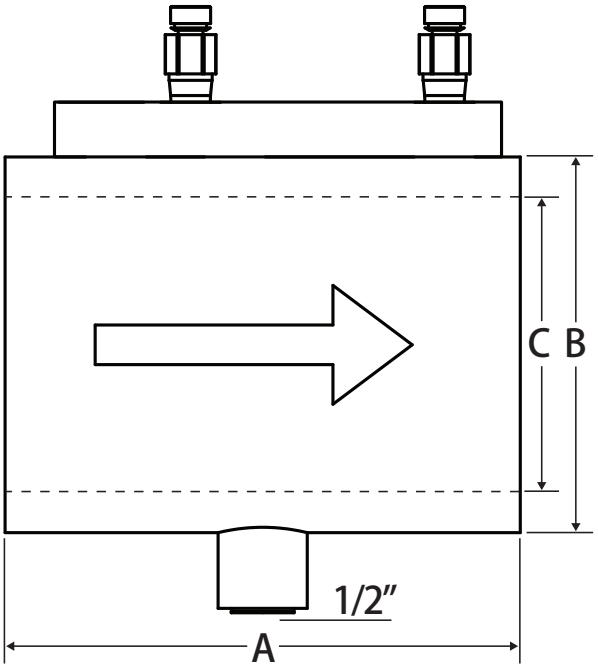

DIRECTION OF FLOW

Features

- 2-50 PSID operating range
- +/- 5% Accuracy
- Two pressure / temperature (PT) test ports
- Location tag
- One additional accessory tap

Pressure and Temperature Rating

- 2-1/2" - 6": 426 PSI
- 8" - 12": 400 PSI
- 350°F Max

Smart Part Number Ordering Guide

AT-HW-L

AT	H	W	L
			See GPM Range

Valve Size	
G	2-1/2"
H	3"
I	4"
J	6"
K	8"
L	10"

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Material Specifications

Part	Material
Body (2-1/2" - 6")	Cast Iron
Body (8" - 12")	Carbon Steel
Balancing Cartridge	Brass, Stainless steel, EPDM
Cartridge C-Clip Retainer	Carbon Steel

Dimensions

Size	A	B	C
2-1/2"	5.80	4.80	4.30
3"	8.90	5.20	5.00
4"	9.60	6.80	6.00
6"	10.2	8.50	6.80
8"	11.0	10.7	8.00
10"	11.0	13.3	9.30

GPM Range

Size	Max Flow Rate	Low or High
2-1/2"	80	L
2-1/2"	120	H
3"	135	L
3"	170	H
4"	270	L
4"	340	H
6"	540	L
6"	680	H
8"	945	L
8"	1190	H
10"	1485	L
10"	1870	H