


Automatic Balancing Valve

Automatic Flow Limiter, Union, 400 WOG



TAF

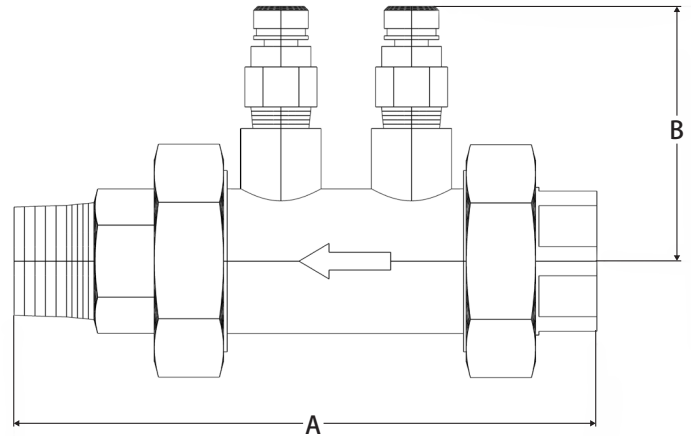

Features

- +/- 5% accuracy
- Two pressure / temperature (PT) ports
- 100% lead tested
- Wetted surfaces contain less than .25% lead content

Approvals



- IAPMO Listed (1/2" - 1")
 - NSF 61-8
 - NSF 372
- ANSI B1.20.1

Pressure and Temperature Rating

- 400 WOG
- 325°F Max

Material Specifications


Part	Materials
Body	Lead Free Brass - CW510L
Union Nut (2)	Brass - CW617N
Tail Piece (2)	Lead Free Brass - CW510L
Temperature Test Port	Brass - CW617N
Balancing Cartridge	316 Stainless Steel

Dimensions

Size	A	B
1/2"	5.23	2.29
3/4"	5.25	2.29
1"	6.32	2.29

*Lengths is for FNPT x MNPT valve, additional dimensions available upon request

Smart Part Number Ordering Guide

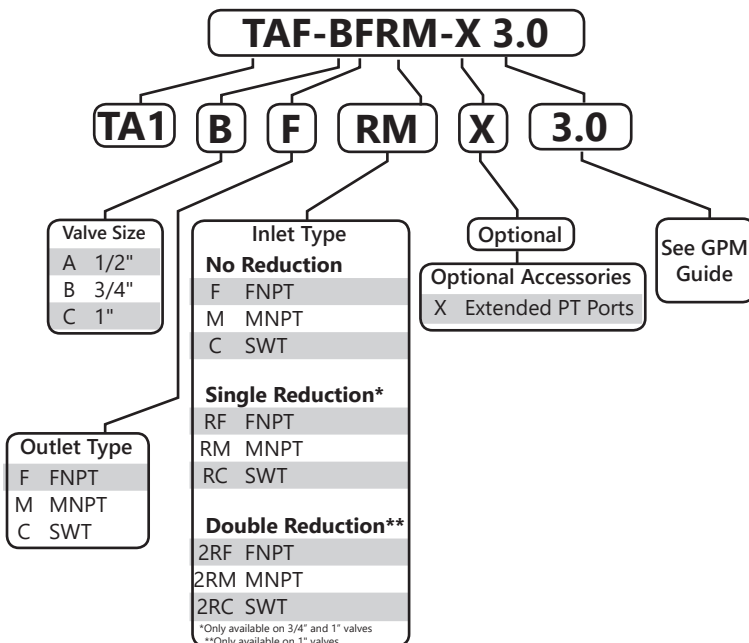

GPM Ordering Guide

Cartridge	Pressure Range	GPM						
		0.50	0.67	0.75	1.00	1.25	1.50	2.00
C2-L	2 - 32	3.00	4.00	4.50	6.00	7.00	8.00	
		9.00	10.00	11.00	12.00			
C2-H	5-60							



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.