


# Combination Strainer Valve

Y-Strainer • Isolation Ball Valve • Union • 600 WOG



TY1

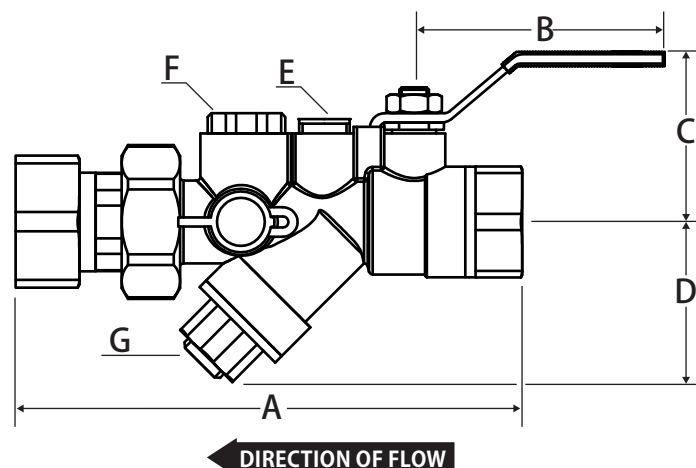


## Features

- Three additional accessory taps
- Triple sealing stem with 2 Viton® o-rings and Teflon® seal
- Blow out proof stem
- 100% leak tested

## Pressure and Temperature Rating

- 600 WOG
- 325°F Max

## Smart Part Number Ordering Guide

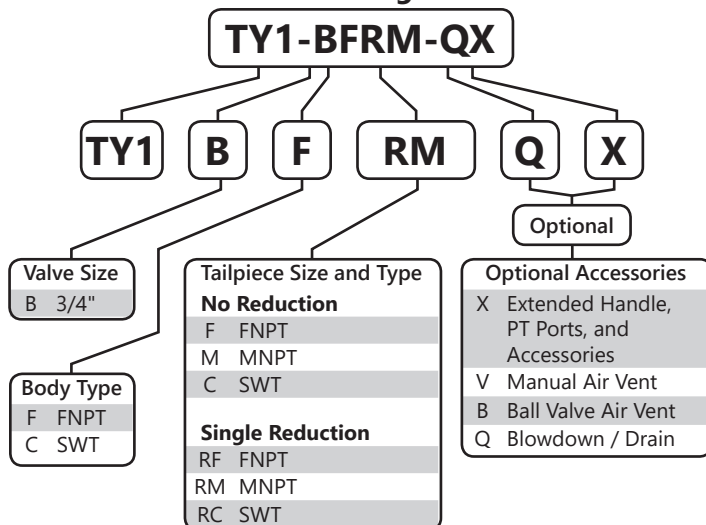

## Material Specifications

Part	Material
Body	Brass -CW617N
End Connection	Brass -CW617N
Ball	Chrome Plated Brass -CW617N
Seat (2)	PTFE
Stem	Brass -CW617N
Packing	PTFE
Stem O-ring (2)	Viton®
Packing Gland	Brass -CW617N
Handle	Steel - Zinc Plated
Handle Nut	Brass -CW617N
Service Cap	Brass -CW617N
Service Cap O-ring	Viton®
Strainer	304 Stainless Steel
Union Gasket	EPDM
Tailpiece	Brass - C37700
Union Nut	Brass - C37700

## Dimensions

Size	A*	B	C	D	E	F	G	Cv
3/4"	5.70	3.08	2.00	1.55	0.25	0.50	0.25	5.50

\*Length is for a SWT x FNPT valve, additional dimensions available upon request