


# Y-Strainer

## Y-Strainer • Bolted Bonnet • Flange Connection • Class 125



YS-FF

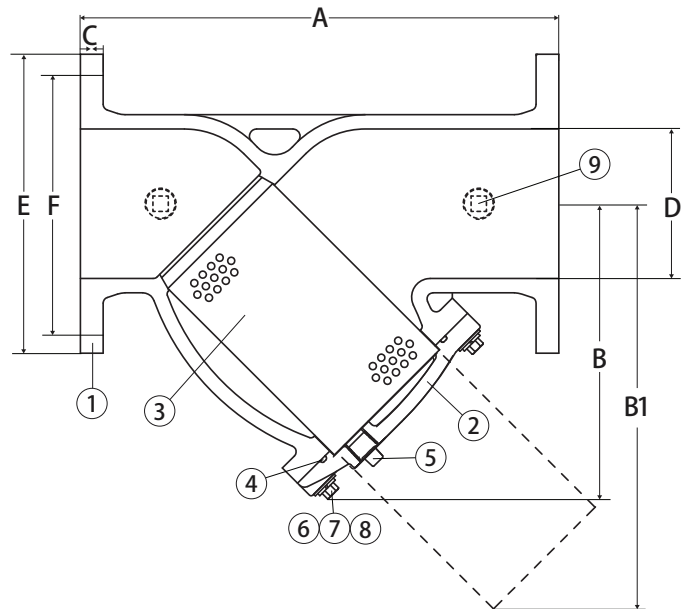

### Features

- Three additional accessory taps
- Class 125 Flange
- 100% leak tested
- Epoxy coated cast iron
- 1/4" NPT test plug upstream and downstream
- Standard Screens:
  - 2" - 4": 1/16" perforations
  - 6" - 8": 1/8" perforations


### Pressure and Temperature Rating

- 200 WOG
- 14° to 248°F Max

### Approvals

- Flange: ANSI B16.1

### Smart Part Number Ordering Guide

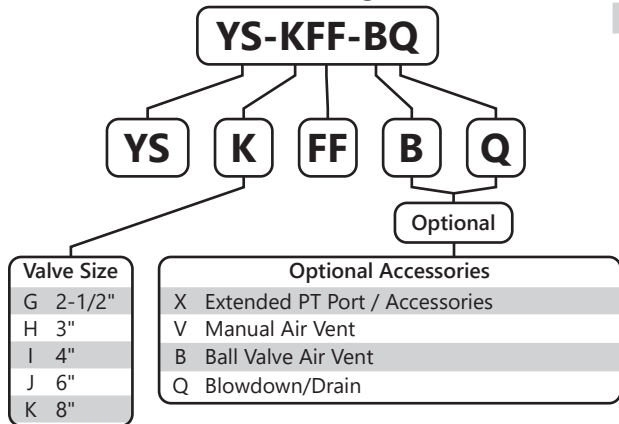

### Material Specifications

No.	Part	Materials
1	Body	Cast Iron - ASTM A126 B
2	Cover	Cast Iron - ASTM A126 B
3	Screen	Stainless Steel 304 - 20 Mesh
4	Packing	EPDM
5	Drain Plug	Brass - 3/4" NPT
6	Bolt	Carbon Steel Galvanized
7	Spring Washer	Carbon Steel Galvanized
8	Washer	Carbon Steel Galvanized
9	Test Plug	Brass - 1/4" NPT

### Dimensions

Part No.	Size	Weight	A	B	B1	C	D	E	F	Cv	N-0C
YS-KFF	2-1/2"	22	11.4	5.4	8.1	0.71	2.56	7.3	5.5	110.9	4-3/4"
YS-HFF	3"	28	12.2	6.0	9.4	0.71	3.15	7.9	6.0	174.2	4-3/4"
YS-IFF	4"	63	13.8	8.1	12.5	0.71	3.94	8.7	7.5	253.4	4-3/4"
YS-JFF	6"	73	18.9	10.6	15.0	0.71	5.90	11.2	9.5	570.3	8-7/8"
YS-KFF	8"	123	23.6	13.4	20	0.75	7.87	13.4	11.75	863.4	8-7/8"



**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).